

1-PIECE BALL VALVE  
STAINLESS STEEL (ASTM A351 CF8M)

# 11K TYPE




SIZE: 1/4" - 2"  
1 PIECE  
INVESTMENT CASTING

CE APPROVED

## HOW TO ORDER

11K BODY MATERIAL R3T SIZE END CONNECTIONS

PRESSURE - TEMPERATURE

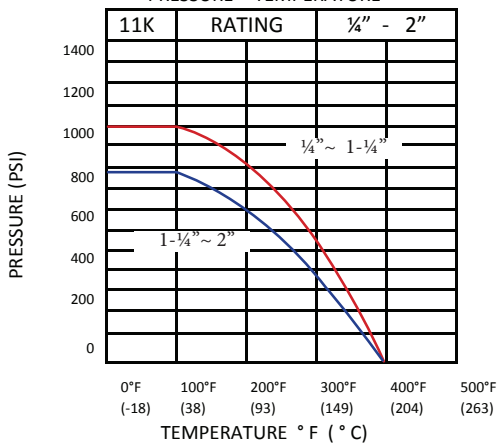

## FEATURES:

PIPE THREAD IN ACCORDANCE WITH:

- \* ANSI B2.1 (BASIC STD FOR STEEL PIPE THREADS)
- \* ANSI B1.20 (NPTF)
- \* BS21:1973
- \* DIN259/2999
- \* ISO228

- BLOW-OUT PROOF STEM

- REDUCE BORE

1000 PSI W.O.G / 800 PSI W.O.G

- MATERIAL TRACEABILITY

- MATERIAL:

\* ASTM-A351-CF8M (INVESTMENT CASTING)

- OPTION:

\* LOCKING DEVICE

## DIMENSIONS

UNIT:mm

SIZE	d	L	H	E	W
DN8 1/4"	9.2	58.5	46.9	109	28.5
DN10 3/8"	9.2	58.5	46.9	109	28.2
DN15 1/2"	9.2	66.0	57.9	102	28.2
DN20 3/4"	12.5	70.0	60.9	102	28.2
DN25 1"	15.0	80.0	63.8	104.7	35.6
DN32 1-1/4"	20.0	95.0	70.3	101.9	35.6
DN40 1-1/2"	25.0	101	72.3	156.1	35.6
DN50 2"	32.0	114	78.3	155.1	35.6

## PARTS

## MATERIAL

1	BODY	ASTM-A351-CF8M
2	INSERT	ASTM-A351-CF8M
3	BALL	ASTM-A351-CF8M
4	SEAT	15% G/F + R-PTFE
5	STEM	ASTM-A351-CF8M
6	THRUST WASHER	PTFE
7	STEM SEAL	PTFE
8	GLAND WASHER	SS304
9	NUT	SS304
10	SPRING WASHER (1/2" - 2")	SS304
11	NUT	SS304
12	HANDLE	PLASTIC
13	HANDLE SLEEVE	(VINIL GRIP)

